

Linphone - Installation Guide

Installing the latest version

1) Go to <http://www.linphone.org>


2) Click on '**Download**'

3) Download the Linphone package for your specific system (Windows / Mac)

Linphone Main Page



Download Page




4) Start the installer, and accept any changes.




5) Navigate through the next few screens.


Click 'Next'

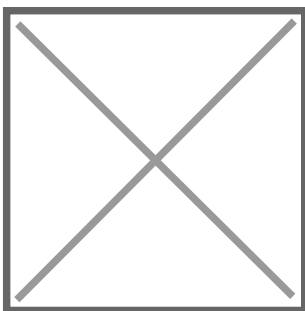


Click 'I Agree'

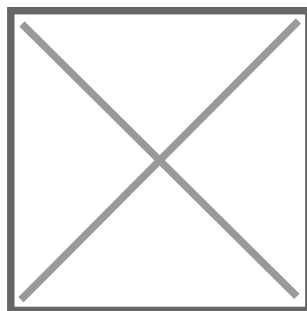


Click 'Next'

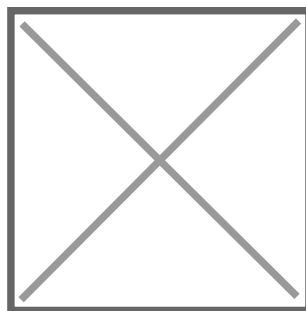


Click 'Next'

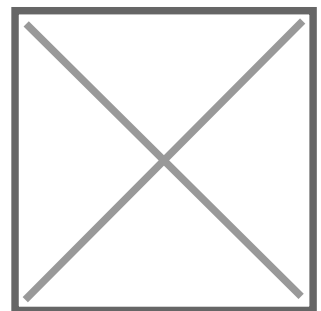

6) Cisco Openh264 is not required and can be left unchecked.

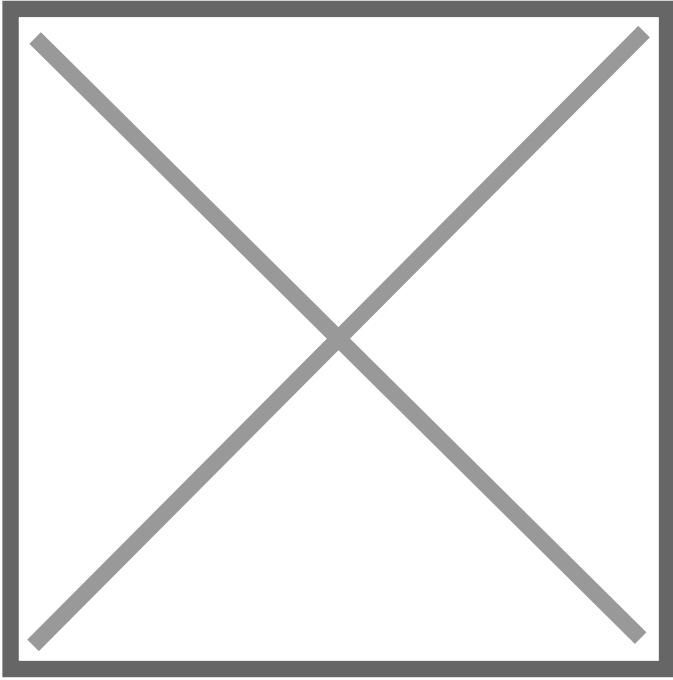

7) Click 'Finish'

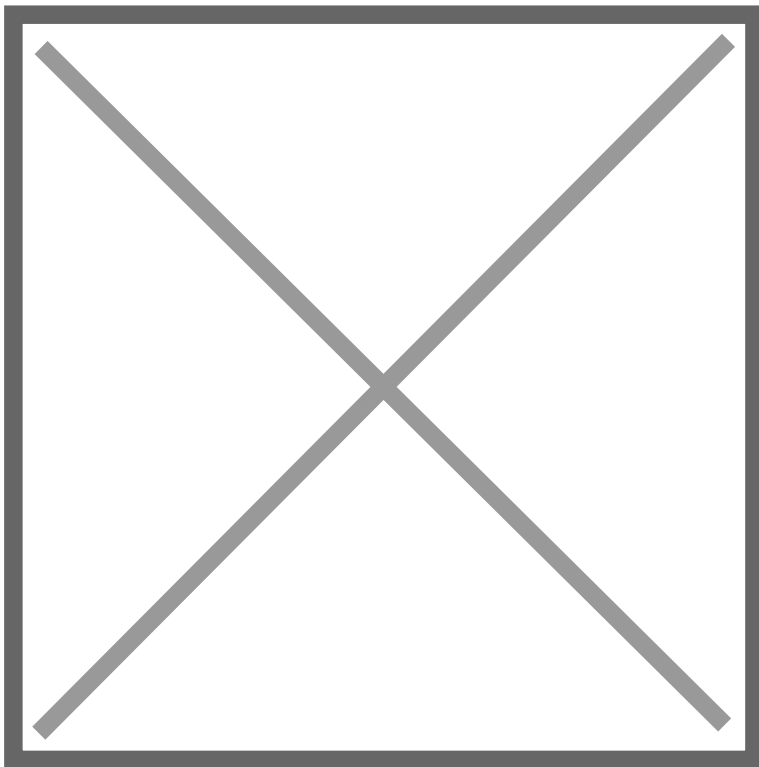


Linphone Icon Setup

- 1) If you wish to create a desktop icon, you can search for **Linphone** using the start menu and then right-click to get to the 'Open file location'
- 2) Right-click and drag to the desktop to create a shortcut




Linphone Configuration

1) Navigate to this screen and click on "Use A Sip Account"

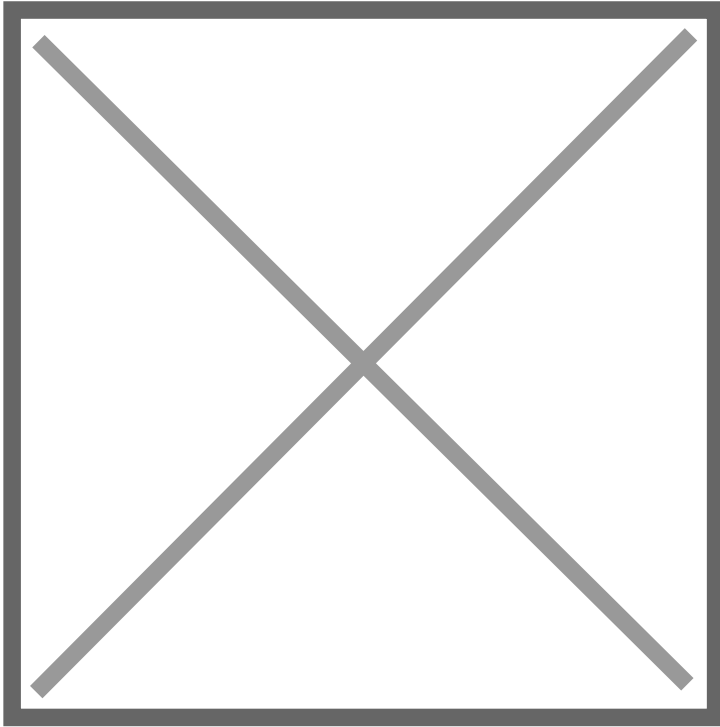


2) The following screen will appear.

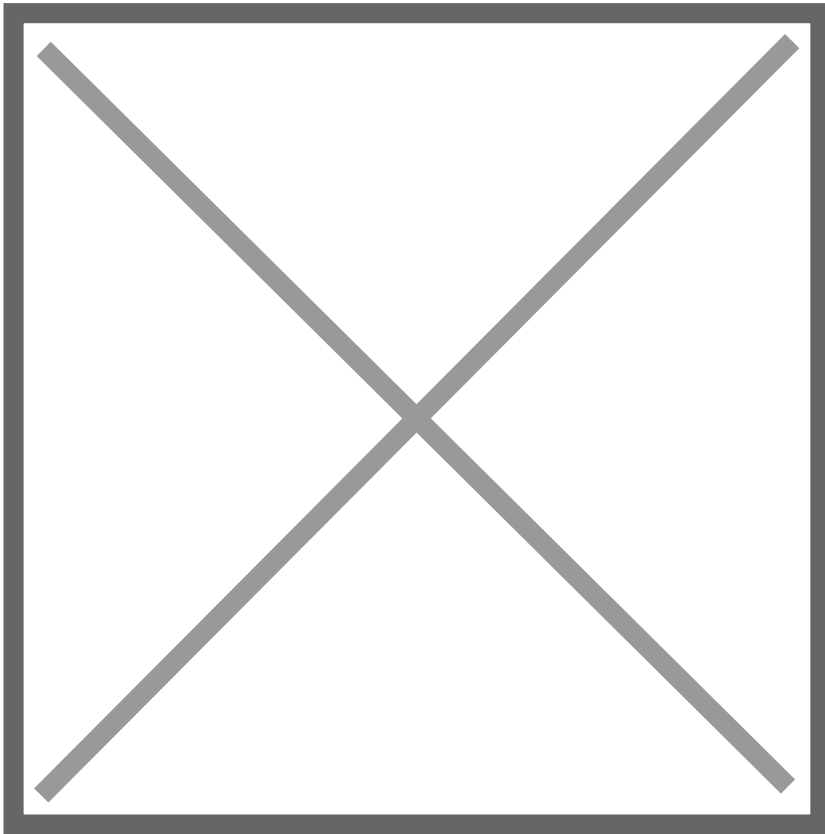


3) Fill out all the fields

Username	Extension number for this new phone
SIP Domain	The server address of the system
Password	Secret token for this extension. <p>This is a secure, machine-generated password, it is highly recommended to copy and paste this password, rather than typing it manually to avoid errors.</p> <p>Incorrect passwords will result in the PC being blocked from the voice communications server for up to 15 minutes</p>
Transport	Unless otherwise instructed, set to 'UDP'

4) If you see the following screen, the entered username/extension or password is incorrect.

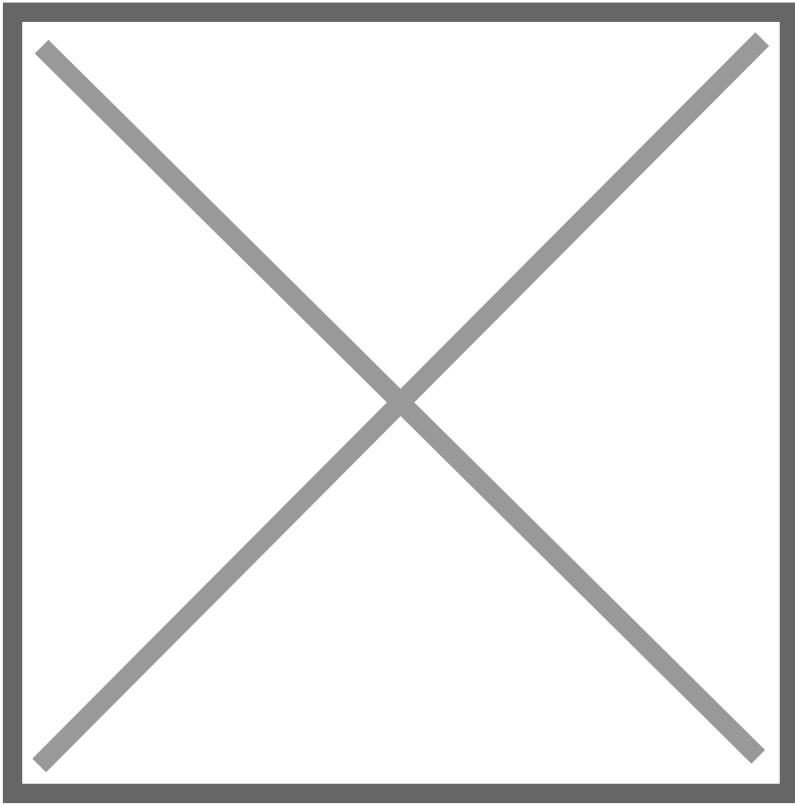

5) The following screen will show if the login credentials are correct.

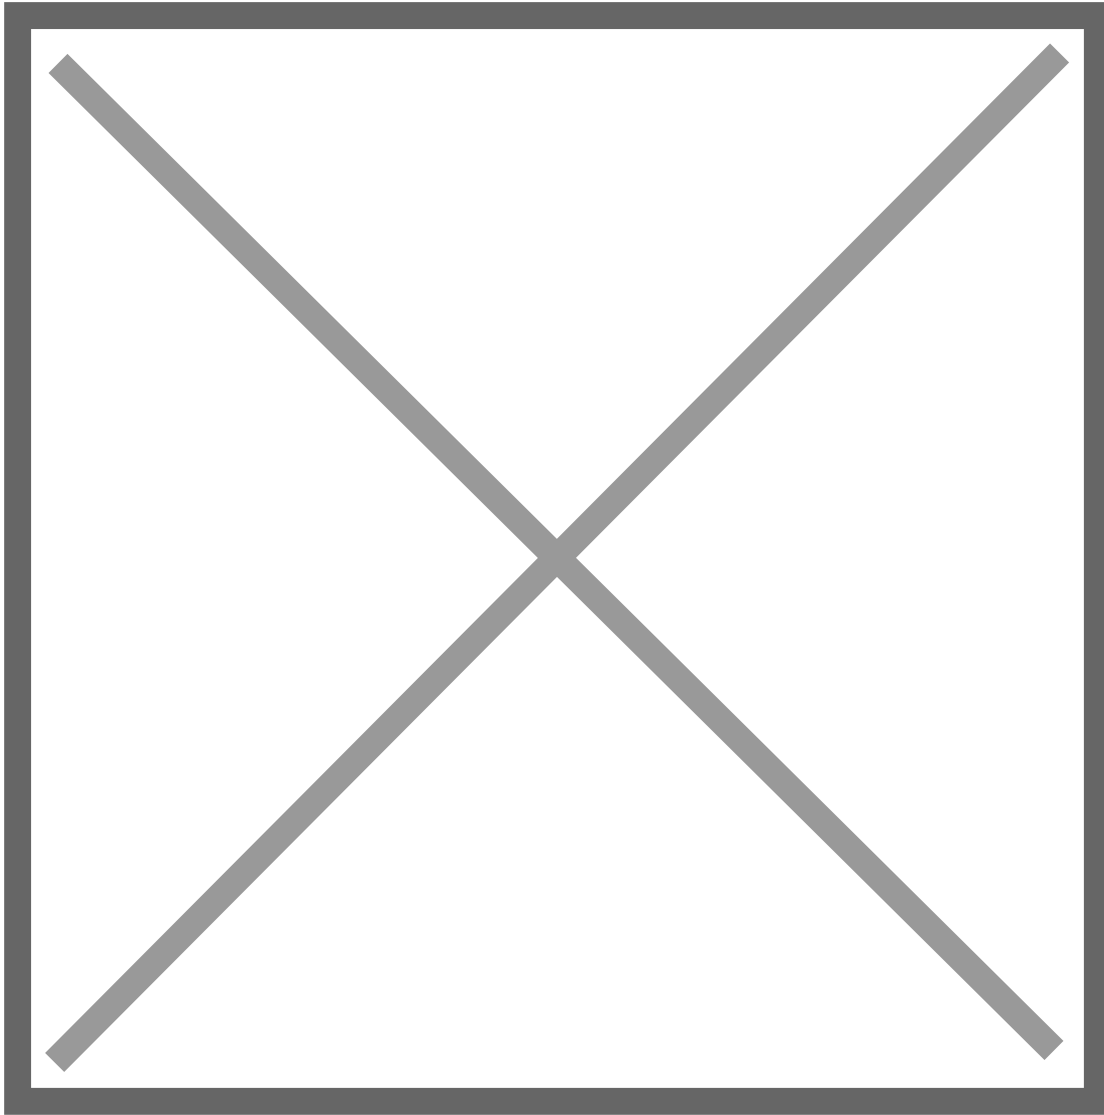

Switch to the newly activated Soft Phone Account.

- 1) Click the top left corner red triangle
- 2) Select the newly configured extension



- 3) Choose the new Soft Phone Account
- 4) Set the 'Active Account' to the second item in the list




5) Setup has been completed when the icon in the top left corner turns green



Final steps. Application Configuration


1) Click the 'Triple Bar' for Preferences at the top-right of the application

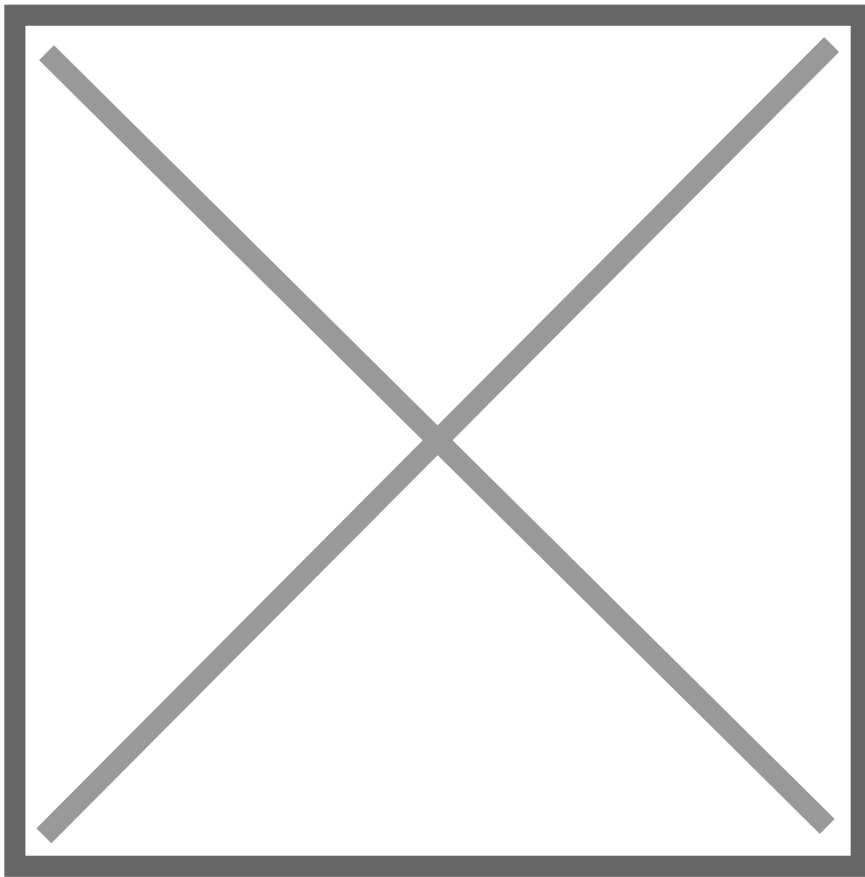

If you don't have an SBC System skip steps 2-3

2) While in the Preferences/Settings screen, click the "Calls and Chat" screen

3) Under "Encryption", click "SRTP"

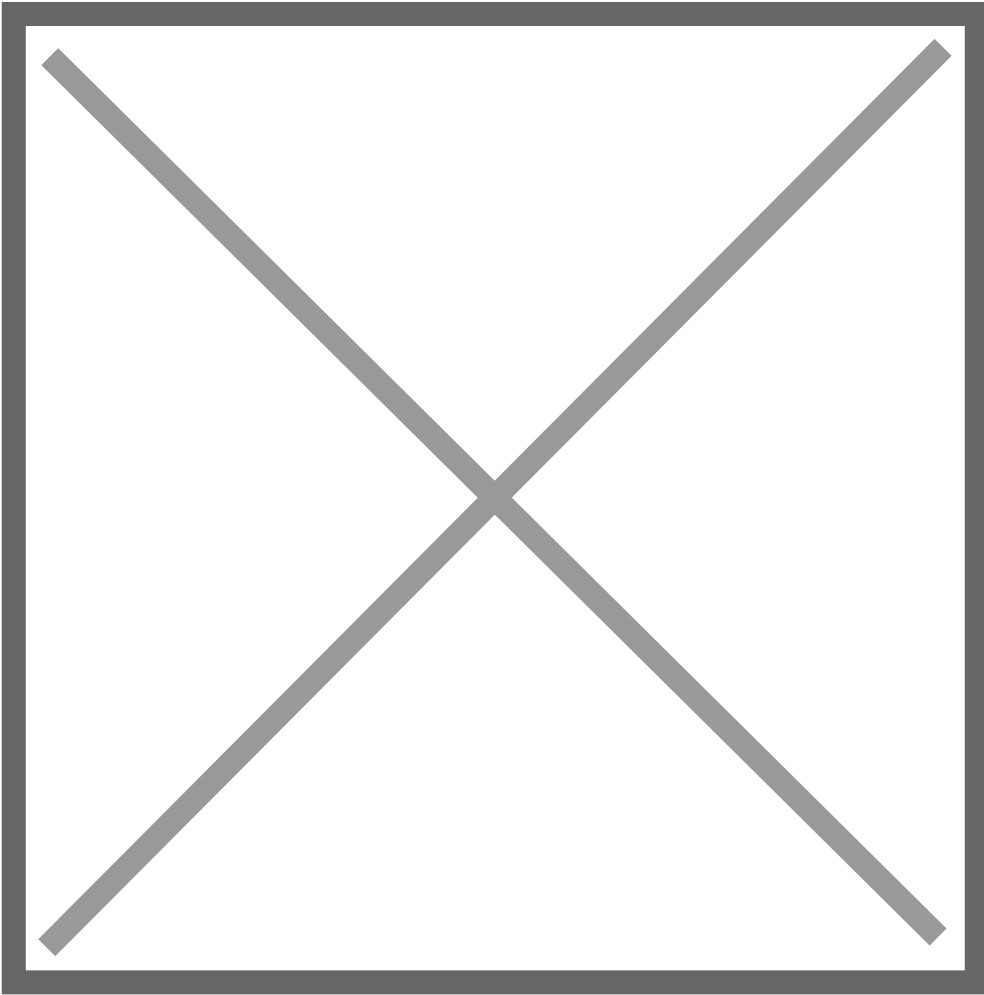

Lastly...

1) While in the Preferences/Settings Screen, Click the 'Audio' tab to set up the devices for speaking and playback.

Typically, Playback/Capture will be a USB Headset and the ringer device will be the built-in speakers (To be able to hear the phone ringing without the headset on)

If the USB Headset is not showing, close and re-launch Linphone

Warning: Do not make any other changes that are not described here. Other changes may cause your software to malfunction.

2) Click 'OK' when finished with the configuration.

Note: When hitting the 'X' (Close) button for Linphone, it may be still running. If you wish to completely stop the Soft Phone Application. Check the system-tray for Linphone, right click and select 'Exit'

Troubleshooting tips

If you are installing Linphone on a Mac, you must give permission to Linphone to use the microphone after installation. Failure to do so will cause the microphone to not work at all in Linphone, but work in all other applications.

To do so, first close Linphone entirely. Click on Settings, then Security. From the list of peripherals on the left side, select the microphone. If the lock icon on the bottom of the window is locked, click it to access the settings that are disabled. Linphone should be checked. Close the windows and retest.



Revision #4

Created 2024-03-25 14:52:07 UTC

Updated 2024-09-02 16:13:58 UTC by Andrew Baumes