

Linphone - Installation Guide

Installing the latest version

1) Go to <http://www.linphone.org>

2) Click on '**Download**'

3) Download the Linphone package for your specific system (Windows / Mac)


Linphone Main Page



Download Page



4) Start the installer, and accept any changes.

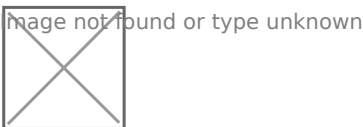





5) Navigate through the next few screens.

Click 'Next'

Click 'I Agree'


Click 'Next'

Click 'Next'




6) Cisco Openh264 is not required and can be left unchecked.

Image not found or type unknown

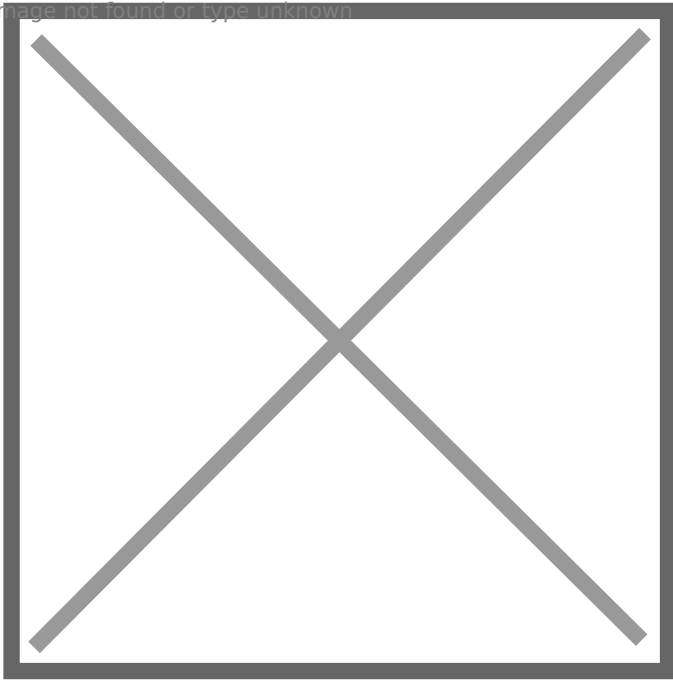

7) Click 'Finish'


Image not found or type unknown

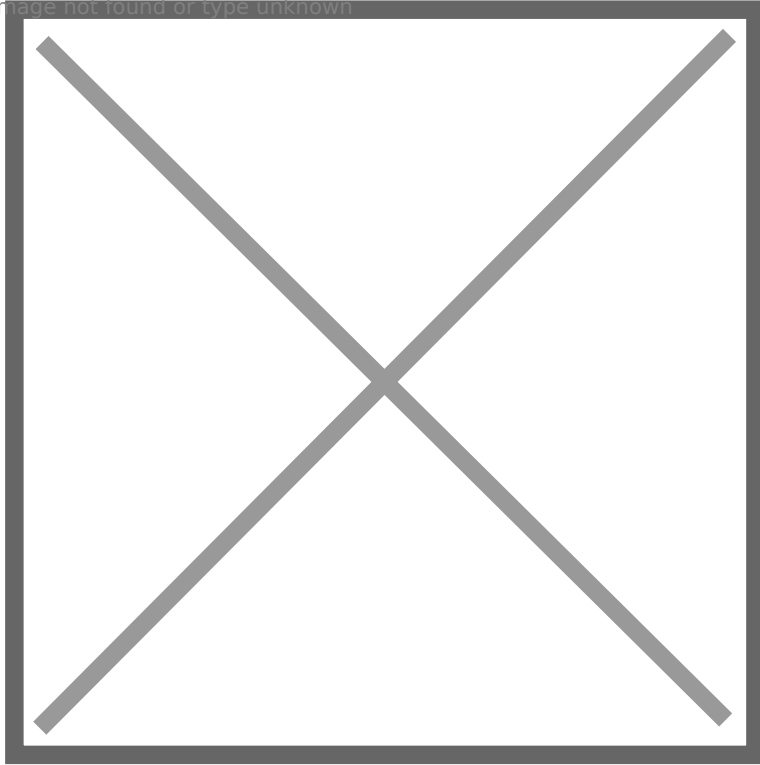

Linphone Icon Setup


1) If you wish to create a desktop icon, you can search for **Linphone** using the start menu and then right-click to get to the 'Open file location'

2) Right-click and drag to the desktop to create a shortcut

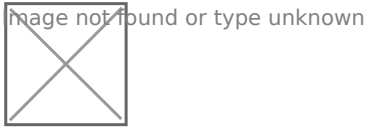


Linphone Configuration

1) Navigate to this screen and click on "Use A Sip Account"

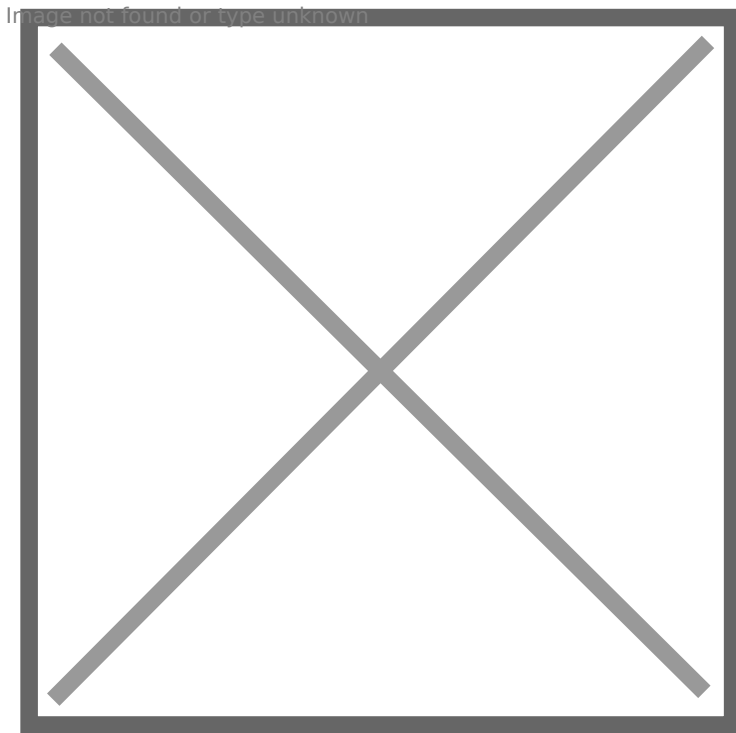

2) The following screen will appear.

Image not found or type unknown

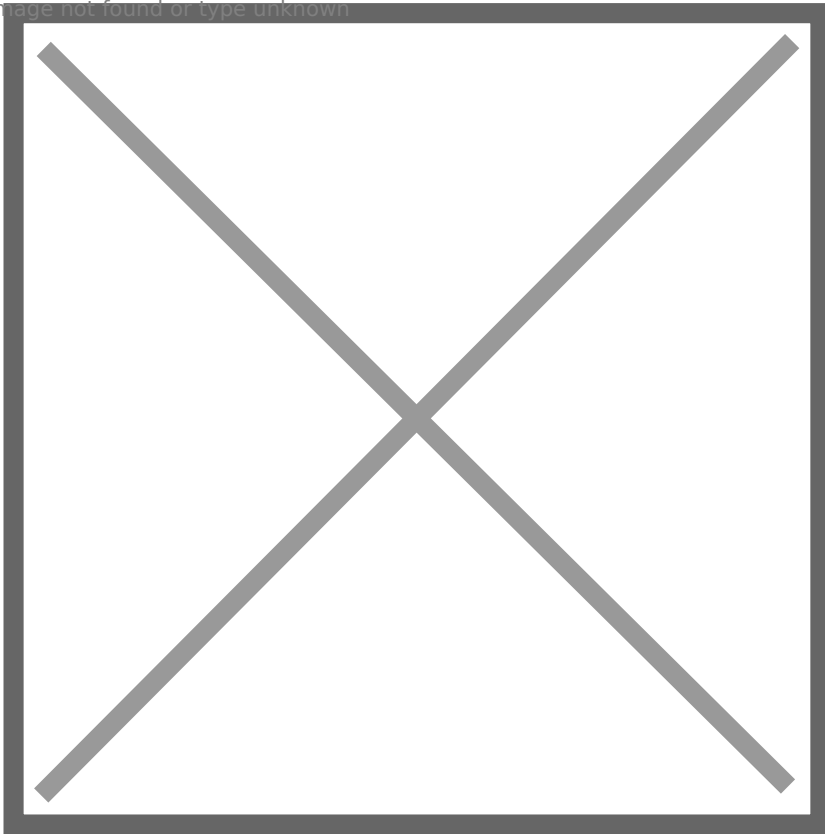


3) Fill out all the fields

Username	Extension number for this new phone
SIP Domain	The server address of the system
Password	<div>Secret token for this extension. This is a secure, machine-generated password, it is highly recommended to copy and paste this password, rather than typing it manually to avoid errors. Incorrect passwords will result in the PC being blocked from the voice communications server for up to 15 minutes</div>
Transport	Unless otherwise instructed, set to 'UDP'


4) If you see the following screen, the entered username/extension or password is incorrect.

Image not found or type unknown

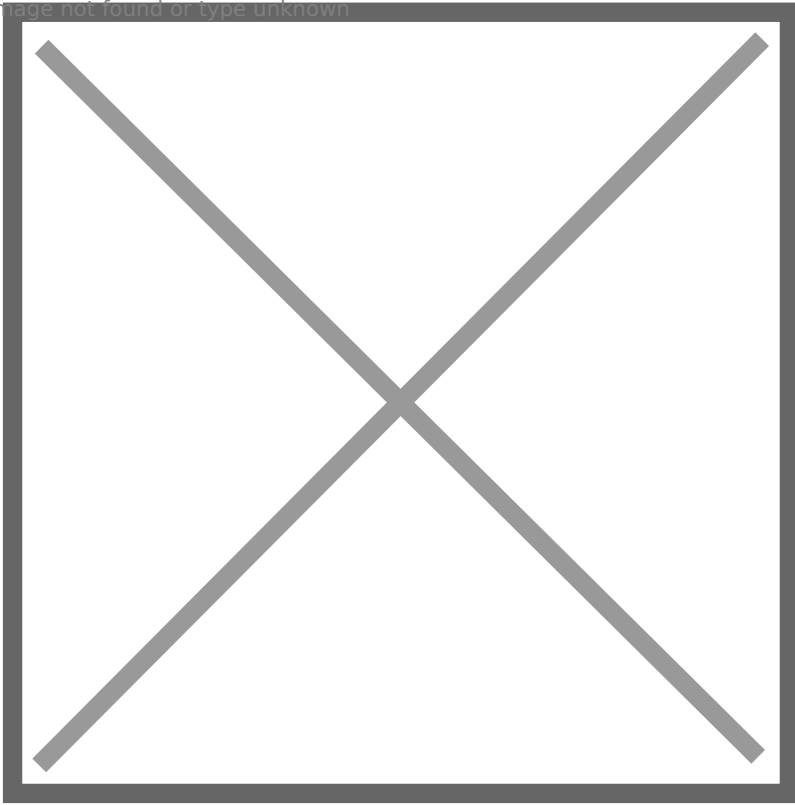

5) The following screen will show if the login credentials are correct.

Image not found or type unknown

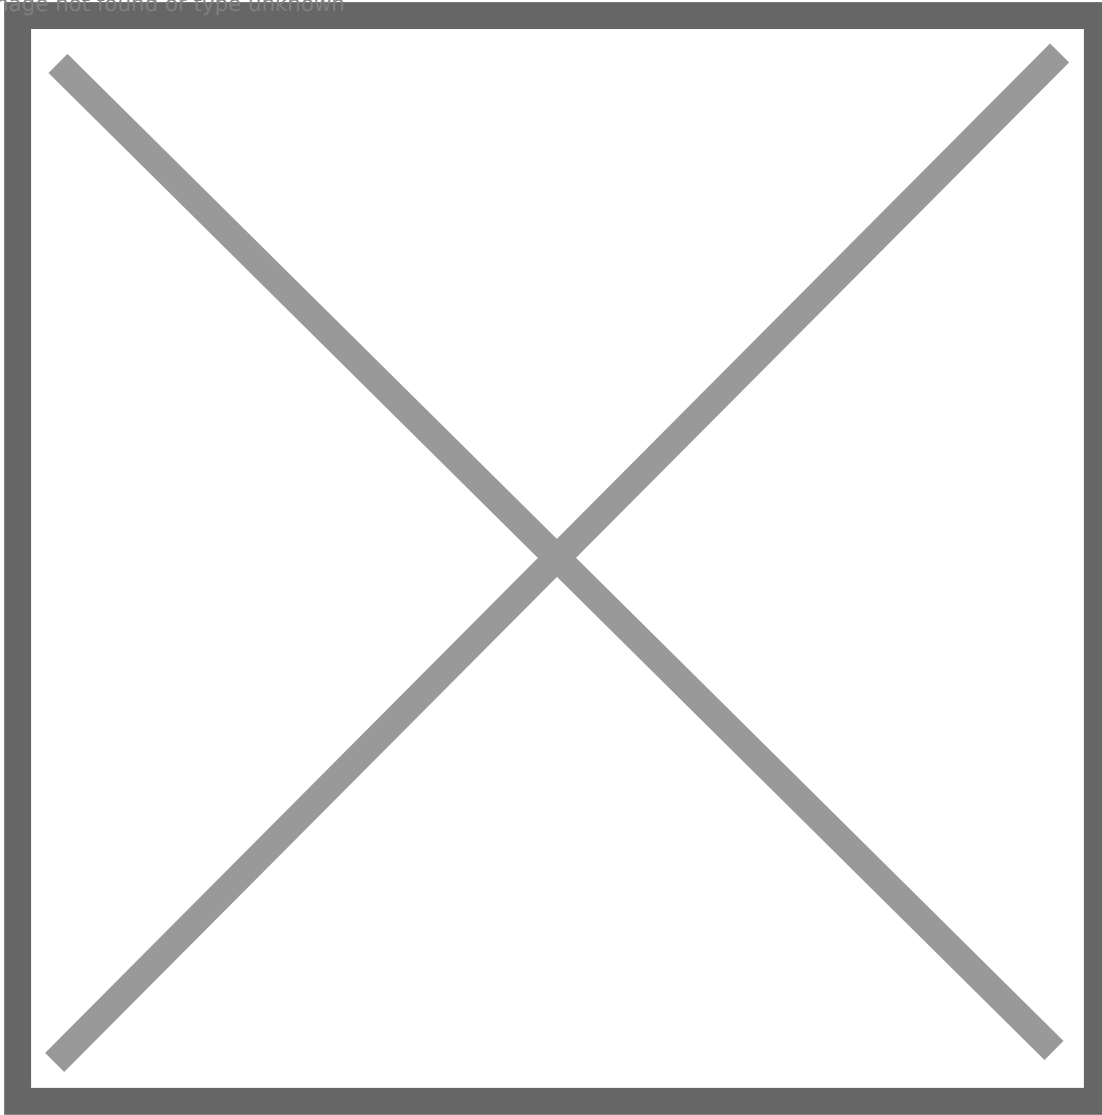

Switch to the newly activated Soft Phone Account.

- 1) Click the top left corner red triangle
- 2) Select the newly configured extension

Image not found or type unknown



- 3) Choose the new Soft Phone Account
- 4) Set the 'Active Account' to the second item in the list

Image not found or type unknown



5) Setup has been completed when the icon in the top left corner turns green

Image not found or type unknown



Final steps. Application Configuration

1) Click the 'Triple Bar' for Preferences at the top-right of the application

Image not found or type unknown


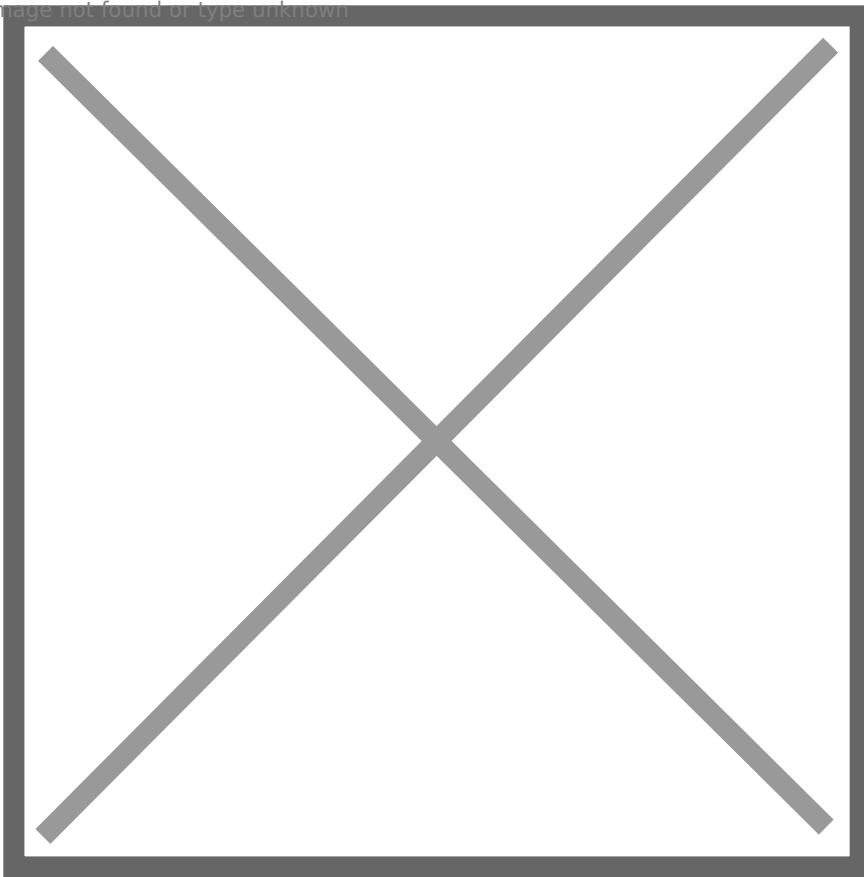


Image not found or type unknown




If you don't have an SBC System skip steps 2-3

2) While in the Preferences/Settings screen, click the "Calls and Chat" screen

3) Under "Encryption", click "SRTP"

Image not found or type unknown

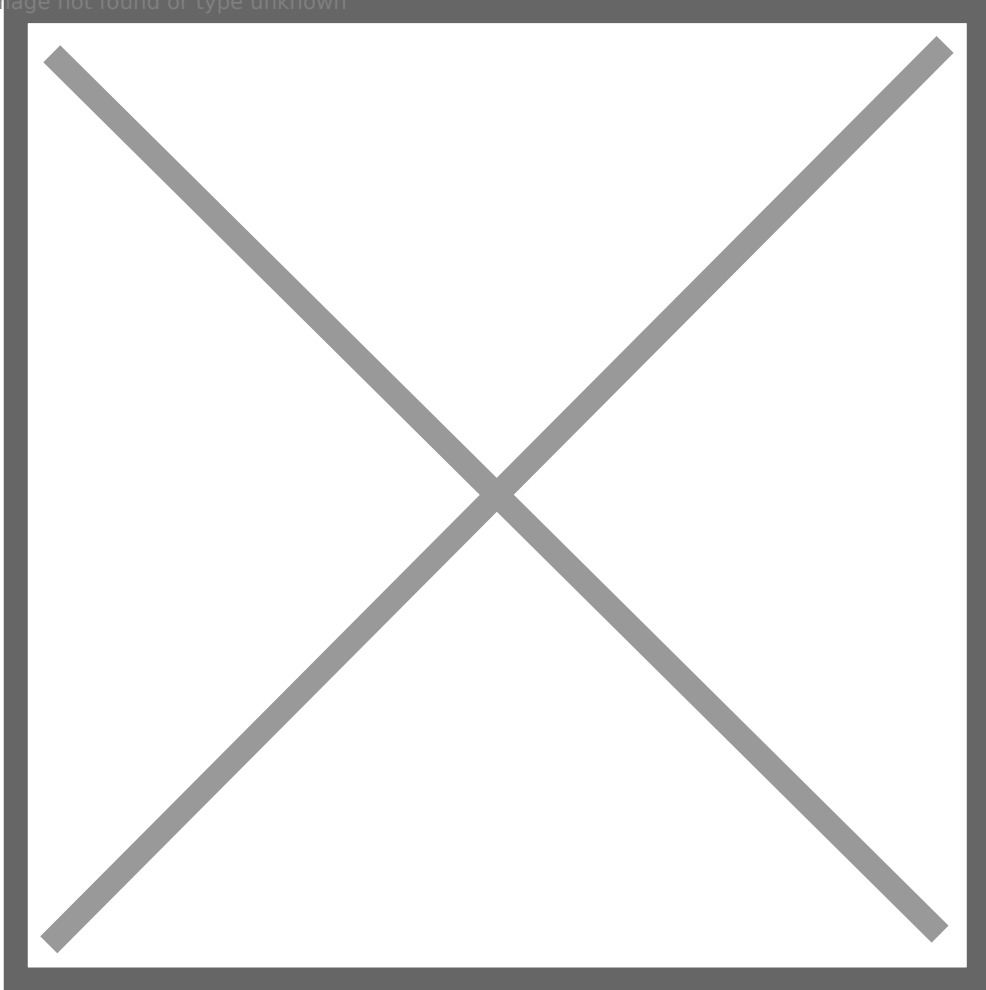

Lastly...

1) While in the Preferences/Settings Screen, Click the 'Audio' tab to set up the devices for speaking and playback.

Typically, Playback/Capture will be a USB Headset and the ringer device will be the built-in speakers (To be able to hear the phone ringing without the headset on)

If the USB Headset is not showing, close and re-launch Linphone

Warning: Do not make any other changes that are not described here. Other changes may cause your software to malfunction.

2) Click 'OK' when finished with the configuration.

Note: When hitting the 'X' (Close) button for Linphone, it may be still running. If you wish to completely stop the Soft Phone Application. Check the system-tray for Linphone, right click and select 'Exit'

Troubleshooting tips

If you are installing Linphone on a Mac, you must give permission to Linphone to use the microphone after installation. Failure to do so will cause the microphone to not work at all in Linphone, but work in all other applications.

To do so, first close Linphone entirely. Click on Settings, then Security. From the list of peripherals on the left side, select the microphone. If the lock icon on the bottom of the window is locked, click it to access the settings that are disabled. Linphone should be checked. Close the windows and retest.

Image not found or type unknown



Revision #4

Created 25 March 2024 14:52:07 by Robert Alexander

Updated 2 September 2024 16:13:58 by Andrew Baumes