

# Phone Map Members


## Overview

The **Phone Map Members** screen is similar to the **Hunt Group Members** screen in which all it is is a screen dedicated to adding the actual **Phone Map Members** to.

- [Group Selection](#)
- [Adding New Phone Maps](#)
- [Removing a Phone Map Group Member](#)

## Group Selection

When you are modifying **Phone Map Members** you do so by selecting an appropriate **Phone Map Group**. Before editing a **Phone Map Group** and it's **Phone Map Members** ensure you have a proper group selected by selecting one from the drop down menu labeled **Select Phone Map Group**, which is at the top left hand corner of the **Phone Map Members** screen. The **Phone Map Group** in the drop-down is referenced by it's **Phone Map Group Name** as well as **ID**, which was setup in the **Phone Map Group** screen.

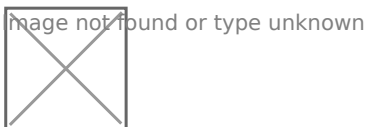

[image.png](#) image not found or type unknown


## Adding New Phone Maps

Start by navigating to the **Phone Map Members** screen via the **Navigation Panel**. Select a **Phone Map Group** from the drop down menu following the instructions according [Group Selection](#). Next click the **New Phone Map** button, choose a name and an appropriate number

(external, internal, local, depending on the **Phone Map Group's Class of Service**).

image.png  
Image not found or type unknown

Image not found or type unknown

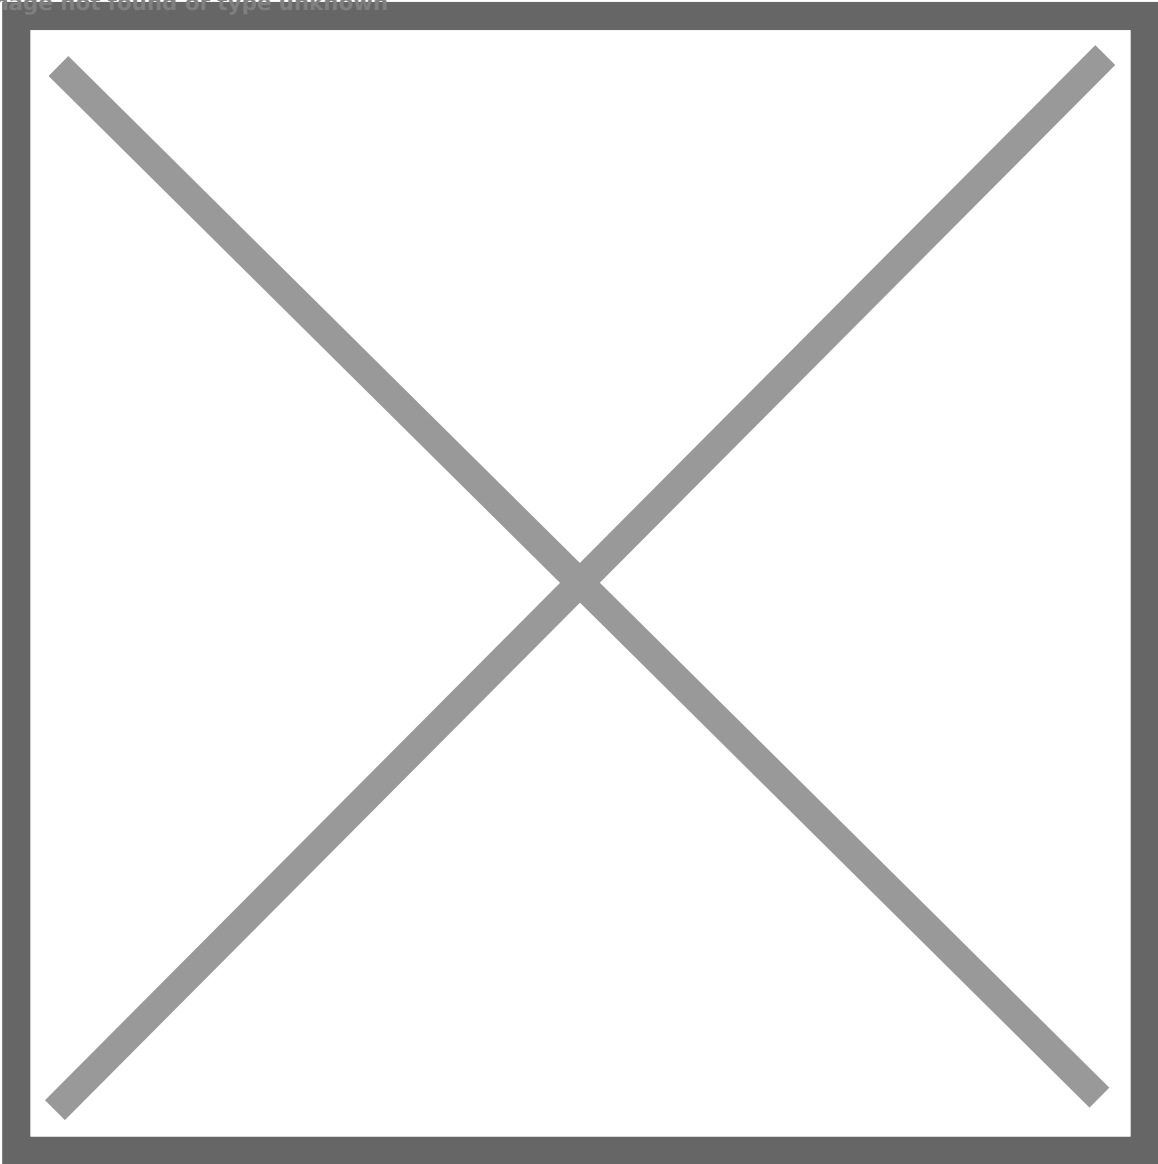

When you are satisfied click **Save New Phone Map** otherwise click cancel. You will see a message stating **Changes Saved** if the number has saved successfully.


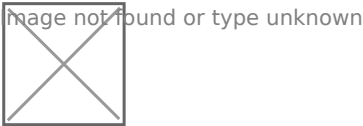


image.png  
Image not found or type unknown

Repeat the previous steps until you are satisfied. You are able to have an unlimited amount of phone maps added to a **Phone Map Group** however the phone maps are designed for a 1 to 1 configuration, meaning only one number can be active at a time. If you wish to use multiple numbers in a phone map group, you should use a **Hunt Group** instead.

image.png  
Image not found or type unknown

Image not found or type unknown

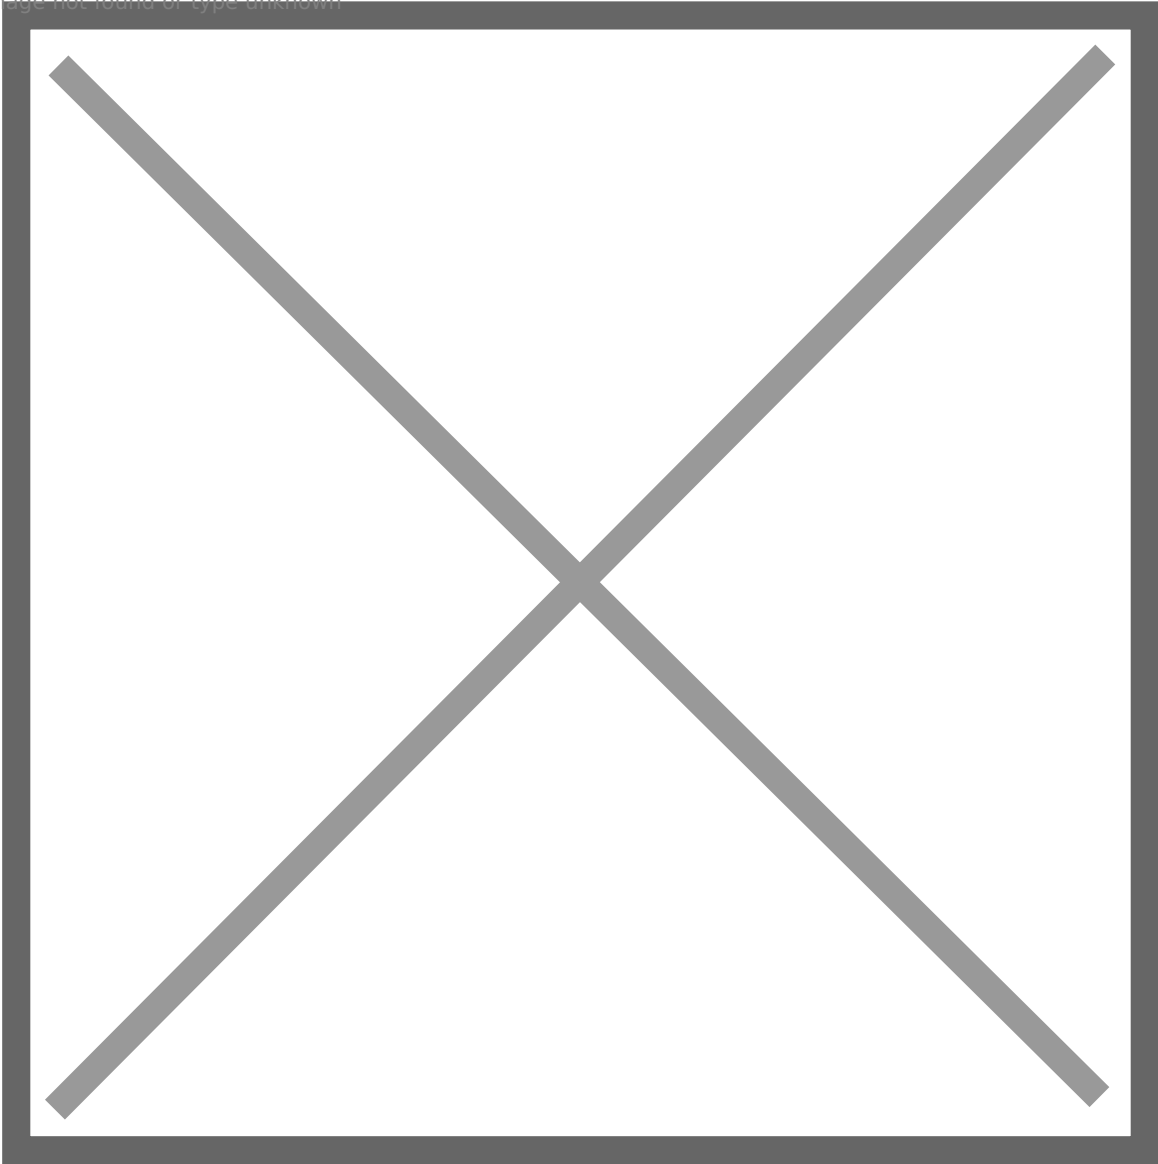

To enable/disable a number, click on the row you wish to modify. Afterwards, check the box to enable or disable the phone map group member. When you're finished click **Save**, you should see a message stating **Changes Saved** after.

image.png  
Image not found or type unknown

Image not found or type unknown



Repeat the previous steps as necessary to ensure that only one phone map member is **enabled**, while the others are disabled. This is indicate by a Yes (for enable) or No (not enabled) in the **Enabled** column.

image not found or type unknown



image.png  
image not found or type unknown

# Removing a Phone Map Group Member

Start by navigating to the **Phone Map Members** screen via the **Navigation Panel**. Select a **Phone Map Group** from the drop down menu following the instructions according **Group Selection**. Find the **Member** you wish to delete, then simply click on the red X in the **delete** column.

A confirmation pop up will appear confirming your selection. If you wish to delete click **OK**, you will see a message stating **Changes Saved**, if this is not the entry to wish to delete click **Cancel**, to return to the screen. Afterwards, ensure that an appropriate **Member** in the PhoneMap Group is enabled, this will be up to your organizations needs. If you do not enable a member after deleting a member that has been previously enabled (such as the example here), then this **Phone Map Group** will not have an active member available to receive calls. If however, you simply deleted a member that is disabled while another remains enabled, no further action is necessary.

image.png  
image not found or type unknown

---

Revision #3

Created 25 March 2024 13:49:38 by Robert Alexander

Updated 27 August 2024 19:55:20 by Robert Alexander